# **CONNECTORS - MAINS / POWER**



2089

### **DC POWER PLUGS & SOCKETS**

DC POWER PLUGS a range of miniature power inlet plugs to suit a range of appliances. The 1.3mm plug suits many Walkman type cassette players. The standard plugs have 10mm shaft, long plugs

have 14mm shaft. size listed refers to the diameter of centre hole of the plug and outside diameter of the shaft.

,	
ľ	
1	
	12 12
	3 5

CODE	TYPE Hole dia	Shaft dia	PRICE
563-016	DC Plug 1.1mm	3.8mm Standard	£0.45
560-350	DC Plug 1.3mm	3.5mm Standard	£0.45
563-018	DC Plug 1.7mm	4.0mm Standard	£0.70
563-020	DC Plug 1.7mm	4.75mm Standard	£0.70
560-355	DC Plug 2.1mm	5.5mm Standard	£0.40
560-360	DC Plug 2.1mm	5.5mm Long	£0.40
560-365	DC Plug 2.5mm	5.5mm Standard	£0.45
560-370	DC Plug 2.5mm	5.5mm Long	£0.45
563-022	DC Plug 2.8mm	5.5mm Long	£0.75
563-024	DC Plug 3.0mm	6.3mm Standard	£0.75

### RIGHT ANGLE DC POWER PLUGS a right angle mini rewireable power inlet plug especially useful where space

is at a premium, 10mm long shaft.



#### CODE TVDE

CODL		FINICE
560-325	Right Angle DC Power Plug 2.1mm	£0.65
560-326	Right Angle DC Power Plug 2.5mm	£0.65

MOULDED DC POWER LEADS an economic alternative to fitting a rewireable DC power plug. DC power plug is moulded on to 1.8metres of light duty black figure 8 cable with white polarity marker strip and moulded grommet 50mm from the free end.

Cable size is 14/0.2 with free end stripped and tinned. Ideally suited to connection from a transformer power supply to DC power sockets on various low voltage equipment.

#### 

CODE	ТҮРЕ	PRICE
560-375	DC Power Lead Plug Size 2.1 x 10mm	£0.90
560-380	DC Power Lead Plug Size 2.1 x 14mm	£0.90
560-385	DC Power Lead Plug Size 2.5 x 10mm	£0.90
560-390	DC Power Lead Plug Size 2.5 x 14mm	£0.90
560-395	DC Power Lead Plug Size 1.3 x 10mm	£0.90

MOULDED DC POWER EXTENSION LEADS extension leads for use with DC power applications, featuring a DC power plug mould-

ed to 5 metres of twin figure 8 cable with white polarity marker stripe moulded to an in-line power socket. Both 2.1 and 2.5mm connectors feature 10mm pin lengths.



### TVDE

CODE	ITPE	PRICE
560-816	DC Power Extension Lead 2.1mm	£2.90
560-817	DC Power Extension Lead 2.5mm	£2.90

UNIVERSAL DC POWER LEAD a universal DC power lead fitted with a 4 way combination plug featuring 1.3 and 3.5mm mono jack

plugs, a 2.1 and 2.5mmDC plugs. The lead has a non-polarised in-line plug which can be reversed, this allows the polarity the be reversed. Cable length 2m.



CODE	ТҮРЕ	PRICE
560-805	Universal DC Power Lead 4 Way Plug 2m	£1.99

1.3mm PCB DC POWER SOCKET PCB mounting DC power socket with switch contact. Can be flush mounted to panel. Sold Individually

	individua	liy.	- Id-	11.2		4.4 ~ / ed		
-	C	1						
560-400 PCB DC Power Socket 1.3mm £0	-		_	wer So	cket 1.3mm		<b>PRIC</b> £0.5	

PCB DC POWER SOCKETS PCB mounting	DC power sockets
which if desired can hand wired. Two	
sizes are available 2.1mm and 2.5mm	
both incorporate a single pole switch.	
Contacts rated at 5A 12V dc	

CODE	ТҮРЕ	PRICE
560-410	PCB DC Power Socket 2.1mm	£0.45
560-415	PCB DC Power Socket 2.5mm	£0.45

DC POWER SOCKETS flush fitting, insulated DC power sockets with break contact to suit 2 1mm

With Dreak contact to Suit 2. Infin	
and 2.5mm DC power plugs.	5
Fixing centres 18mm.	

CODE	ITPE	PRICE
DCS021	DC Power Socket 2.1mm	£0.59
DCS025	DC Power Socket 2.5mm	£0.59

DC CHASSIS POWER SOCKETS high quality chassis mounting DC power sockets. Flush mounting with single hole fixing to provide a neat appearance, two sizes are available 2.1mm and 2.5mm both incorporate a single pole

switch. Max panel thickness 2.5mm, panel cut out 12.6mm. Bezel diameter 14mm, length 15.7mm.



CODE	ТҮРЕ	PRICE
560-440	DC Chassis Power Socket 2.1mm	£0.95
560-445	DC Chassis Power Socket 2.5mm	£0.95

DC POWER SOCKETS panel mounting DC power sockets in 2.1

and 2.5mm sizes mating with suitable DC power plugs. Integral single pole switch operates when plug is inserted or removed. Contacts rated at 1A 16V DC.



CODE	ТҮРЕ	PRICE
560-329	2.1mm Panel Power Socket	£1.29
560-330	2.5mm Panel Power Socket	£1.29

IN-LINE DC POWER SOCKET an line DC power socket with hard plastic cover for low voltage. Solder

connections. Pin 1.3mm dia, outside	Contraction of the local division of the loc
diameter 5mm, length 9mm.	0

CODE	ТҮРЕ	PRICE
07-0956	In-Line DC Power Socket 1.3mm	£1.50

DC POWER LINE SOCKETS a range of rewireable miniature DC power line sockets to suit our range of DC power plugs. Available in 2.1mm and 2.5mm sizes and are

supplied with integral cable strain relief.

	1.14	19 M	
	æ	-	
20.40			
N 198			
5.4	-		
<i>a</i> ,			

CODE	TYPE	PRICE
560-450	DC Power Line Socket 2.1mm	£0.90
560-455	DC Power Line Socket 2.5mm	£0.90

2090

TEL. 01243 842424 FAX. 01243 842525 \_

### **CIGAR LIGHTER PLUGS & SOCKETS**

CAR DC POWER PLUG STANDARD used for taking power from a car cigar lighter socket. Standard quality, unfused version. Maximum continuous rating 3A 12V.

CODE TYPE 563-420

Car DC Power Plug..... £0.50

PRICE

CAR DC POWER PLUG HIGH QUALITY used for taking power from a car cigar lighter socket. A superior guality version with spring loaded contacts and

rubber cable protector. Unfused version. Maximum continuous rating 3A 12V.

CODE TYPE PRICE 562-026 Car DC Power Plug High Quality..... £0.65

CAR DC POWER PLUG FUSED a superior quality car cigar lighter plug with 5A fuse. It

has spring loaded contacts a rubber cable protector.

CODE TYPE PRICE Car DC Power Plug Fused..... £1.35 562-425

IN LINE CAR CIGAR LIGHTER SOCKET an in-line car cigar lighter socket, 12Vdc, with brass contacts and rubber cable protector. Solder tags for cable fixing.

CODE TYPE 563-028 In Line Car Cigar Lighter Socket..... £0.90

CHASSIS MOUNT CIGAR LIGHTER SOCKET a chassis mount-

ing cigar lighter socket, 12Vdc, for single hole mounting.

PRICE

PRICE CODE TYPF 563-030 Chassis Mounting Cigar Lighter Socket..... £2.99

CIGAR LIGHTER SOCKET SPLITTER an in car adaptor to pro-

vide two cigar lighter sockets from the single socket normally provided in the car. internally fused at 15A.

PRICE

CODF TYPF 563-195 Cigar Lighter Socket Splitter..... £3.50

CIGAR LIGHTER SOCKET EXTENSION a 2 way adaptor to give

2 x 12vdc car cigar lighter sockets from one socket. Incorporates a power on LED protective caps and fuse. 1 plug to 2 sockets.



CIGAR LIGHTER SOCKET EXTENSION a 3 way adaptor to give

3 x 12Vdc car cigar lighter sockets from one socket. Supplied with a 2M lead.



CODE TYPE 78907 12Vdc 3 Way Extension Socket..... £6.99

4-IN ONE 12 VOLT DC SOCKET converts car lighter socket to 3 x DC output sockets (12V / 2Amp) and 1 dedicated lighter socket. Also incorporates LED

indicators for battery status check and a 1.35 metre cable.



CODE	TYPE	PRICE
563-799	4-In One 12 Volt DC Socket	£6.99

POWER LEAD provides a cigar lighter socket where none is fitted or where one is required outside of the car. Heavy duty crocodile clips take power directly


from battery. Max current 10A. Length 600mm.



CODE TYPF 563-265

PRICE Power Lead - Battery Clips to Cigar Socket ...... £2.50


POWER LEAD a cigar lighter plug with lead terminating in a 4-way adaptor to give 4 alternative plugs:- 2.5mm and 3.5mm jack plugs, 2.1mm and 2.5mm DC plugs. Max current 2A. Fuse (2A) built into

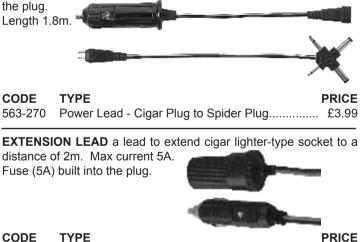

563-275 Extension Lead Cigar Plug to Cigar Socket 2M... £3.50


## 7.2V PLUGS & SOCKETS

7.2V PLUG & SOCKET an un-assembled 7.2V plug and socket for connecting battery packs.



E-mail: sales@squirestools.com - www.squirestools.com

CODE

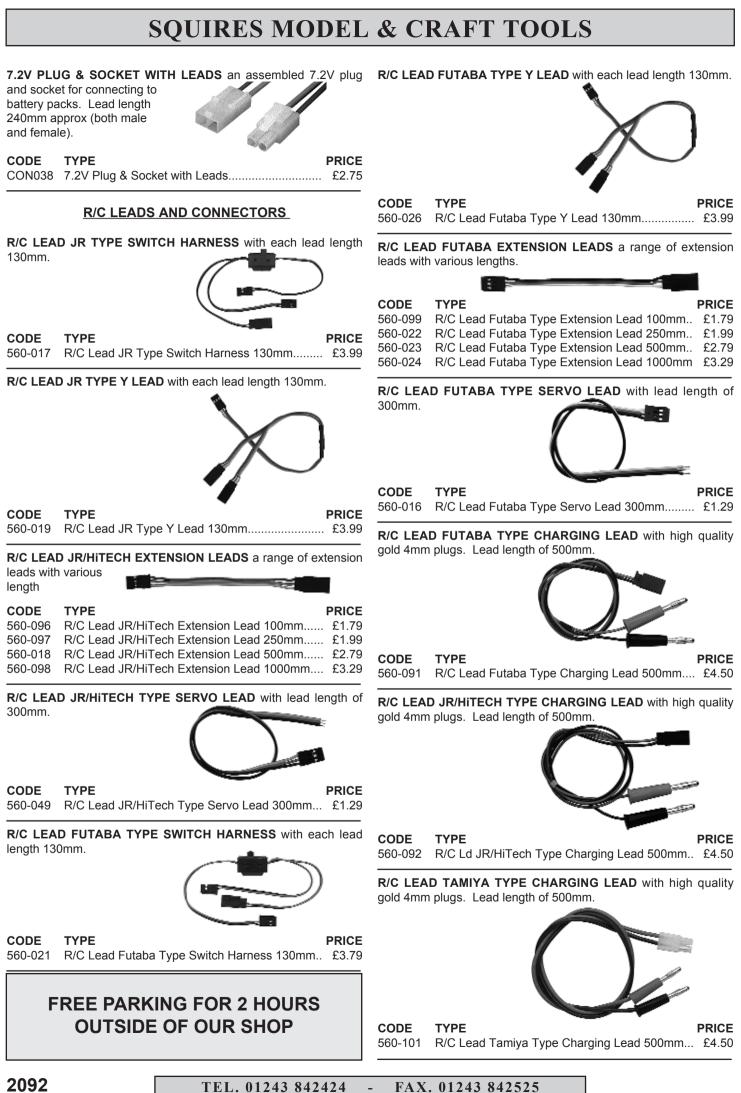

### **MOLEX MICRO-FIT 3.0 POWER CONNECTORS**

An interconnect system based on a 3.0mm grid spacing which is capable of carrying 5 amp. This high density dual row wire to wire (free or via panel mounting) system is ideally suited to many signal and power applications. Positive latch prevents accidental disconnection, full polarisation, fully isolated contacts. The terminals are crimped to the wire, requires pin and socket contacts listed below.

### **Technical specification**

Voltage rating:- 250V ac (rms) or DC. Current rating:- 5A per contact Contact resistance:- 10m ohm max. Insulation resistance:-1000M ohm max Dielectric strength;- 1500V ac.

Contact material:- Tin plated phosphor bronze

Housing material:- Polyester. Header material:- High Temp LCP.

### **MICRO-FIT 3.0 RECEPTACLES & PANEL MOUNT PLUGS**

housings for wire to wire connections. The plugs are fitted with ears allowing panel mounting. Receptacle Molex type 43025xx.00. Plug Molex type 43020-xx00 where xx is no of ways.



CODE	ТҮРЕ	PRICE
	Free receptacle - accepts socket contacts	
560-331	Micro-fit 3.0 Free Receptacle 2 Way	£0.40
560-332	Micro-fit 3.0 Free Receptacle 4 Way	£0.50
560-333	Micro-fit 3.0 Free Receptacle 6 Way	£0.65
560-334	Micro-fit 3.0 Free Receptacle 8 Way	£0.80

### Plug - accepts pin contacts

560-336	Micro-fit Plug 2 Way	£0.40
560-337	Micro-fit Plug 4 Way	£0.45
560-339	Micro-fit Plug 8 Way	£0.80

CRIMP CONTACTS Tin plated phosphor bronze contacts for use with plugs and receptacles. Supplied in Packs of 2.

			Rear		
Technical	Specificati	on			
	wire size	wire size	insulation	Molex	
Туре	(AWG)	(mm)	diameter (r	max) type	
pin	20-24	0.5-0.2	1.65	43031-0007	
socket	20-24	0.5-0.2	1.65	43030-0007	
CODE	TYPE				PRICE
560-352	Crimp Co	ontacts Pin	AWG 20 -	24 Pk of 2	£0.30
560-354	Crimp Co	ontacts So	cket AWG	20 -24 Pk of 2	£0.30

IF THERE ARE OTHER PRODUCTS THAT YOU WOULD LIKE US **TO STOCK, PLEASE FEEL** FREE TO LET US KNOW.

### MAINS POWER CONNECTORS

MINIATURE 3 POLE MAINS CONNECTORS miniature industry standard 3 pole non-reversible mains connectors moulded in glass-filled nylon, with contacts rated at 2.5A 250V AC. The range comprises a panel mounting plug, and free sockets available in right angle or straight formats with or without strain relief. The free socket without strain relief is rated at 50V because of its construction, however this rating can be safely increased to 250V AC provided the connector is totally encloses e.g. for internal connections, and is accessible only by use of a tool ie cannot be reached accidentally. An insulating boot is available for the chassis mounting plug.



Technical Specification	
Contact rating	3A
Contact resistance	<1
Contact material - plug	Br
- socket	Br
Insulation resistance	>1
Temperature range	-2

A 250V  $10 \text{m}\Omega$ rass, tin dipped ass, silver plated 10<sup>5</sup>M 20° to 60°C

CODE	ТҮРЕ	PRICE
560-819	Mini 3 Pole Free Socket Connector	£2.15
560-820	Mini 3 Pole Free Socket & Strain Relief Conn	£7.50
560-821	Mini 3 Pole Free Socket Right Angle Conn	£5.99
560-822	Mini 3 Pole Panel Plug Connector	£2.50

CABLE SLEEVE a 6mm internal diameter, rubberised cable sleeve suitable for use with the Bulgin PX0631(560-819), PX0646 (560-820) and PX0649 connectors listed above. The increased internal diameter of this sleeve allows the connectors to be used with larger diameter cables - e.g. the silicone cable often found on soldering irons. Flange dia 11.9mm overall length 28.6mm.

CODE	ТҮРЕ	PRICE
560-823	Bulgin Cable Sleeve	£0.70

INSULATING BOOT a black PVC rear insulation boot suitable for use with miniature 3 pole power connectors type 560-822 and 560-821. Dimensions overall length 31.0mm, internal dia 15.1mm, cable diameter 5.5mm.

1.	of the local division in which the
1 1 Million	in particular in the
A - 171183	
A 1990	
1.1	

CODE	ТҮРЕ	PRICE
560-824	Bulgin Insulating Boot	£1.15

## POST FREE DELIVERY **ON ALL ORDERS WITHIN** THE UNITED KINGDOM

## MINIMUM ORDER VALUE £10.00

E-mail: sales@squirestools.com - www.squirestools.com

### GENERAL PURPOSE MINIATURE MAINS CONNECTORS

miniature 3-pin connectors moulded in glass filled nylon, with contacts rated at 3A, 250V AC. The plug has screw terminations, right angle cable entry, cord grip and touch proof pins. The chassis mounting socket has solder tag terminations. An insulating boot is available for chassis mounting socket.



Technical Specification	
Contact rating	3A, 250V rms
Contact resistance	<10m
Contact material - Plug	Brass, nickel plated
Socket	Brass, tin plated
Insulation resistance	10 <sup>4</sup> ΜΩ
Temperature range	+20 to +70°C

CODE	ТҮРЕ	PRICE
560-825	Gen Purpose Mini Mains Conn Free Plug	£4.25
560-826	Gen Purpose Mini Mains Conn Chassis Skt	£3.75

FIGURE 8 MAINS INLET CONNECTORS panel mounting figure 8 mains inlet connectors available with solder tags or right angle PCB pins used for connecting mains power to portable equipment with battery/mains options. Manufactured to BS 4491.

### **Technical Specification**

Contact Rating 2A 250V AC Housing Material Black Nylon UL94V-0 rated Contacts Copper Alloy, Tin Plated Temp. Range -25°C to + 85°C



CODE	TYPE	PRICE
560-460	Figure 8 Mains Inlet with Solder Tags	£0.95
560-465	Figure 8 Mains Inlet with PCB Pins	£1.25

IEC CHASSIS MAINS INLET PLUG panel mounting IEC mains inlet connectors approved to IEC320 and CEE22. Available with either 4.8mm or 6.3mm fast-on connections. Used for connecting mains power to equipment. Contact rating 10A 250V AC. A rear insulating boot is available Code 560-520.



CODE	ТҮРЕ	PRICE
560-475	IEC Mains Inlet Plug (4.8mm Terminals)	£0.95
560-480	IEC Mains Inlet Plug (6.3mm Terminals)	£0.95

IEC FUSED CHASSIS MAINS INLET PLUG panel mounting IEC fused mains inlet connectors manufactured to BS 4491, available with either 3.8mm or 6.3mm fast-on connections. The 5 x 20mm fuse is contained in a draw and has space for storing a spare. Used for connecting mains power to equipment. A rear insulating boot is available Code 560-525

### **Technical Specification**

10A 250V AC Fused Contact Rating Housing Material Nylon 66 Contacts 2.8mm or 6.3mm Fuse Holder 5 x 20mm



CODE	ТҮРЕ	PRICE
560-490	IEC Mains Inlet Plug Fused(2.8mm)	£1.75
560-495	IEC Mains Inlet Plug Fused(6.3mm)	£1.75

IEC CHASSIS SOCKET a female version of chassis plug used for power take off applications. Terminated with 4.8mm fast-on connections. Contact rating 10A 250V AC. This connector has all major approvals. A rear insulating boot is available Code 560-520.



PUSH FIT IEC INLET/OUTLETS push fit IEC connectors featuring a mains power inlet plug and power take-off socket in a single connector. Fully approved to UL, CSA, VDE, SEV, SEMKO, NEMKO, DEMKO and FEMKO. Supplied fitted with 2.8mm or 4.8mm faston connections.

### **Technical Specification**

contact rating	10A 250V AC	- 117-
Terminations	2.8 x 0.8mm faston	
	or 4.8 x 0.8mm faston	in E
Housing	Nylon rated UL94V-0	
Contacts	Copper alloy, tin plated	1000
Panel cut-out:-		(LA)
Panel 0.8 - 1.2mm	50.3 x 33.3mm	Constant of
1.3 - 2.0mm	50.5 x 33.3mm	
Temperature range	-25°to +85°C	

#### TVDE CODE

	· · · · <b>=</b>	
560-414	IEC Inlet/Outlet Socket 2.8mm	£3.50
560-416	IEC Inlet/Outlet Socket 4.8mm	£3.50

MULTIPLE PUSH FIT IEC SOCKETS prewired push fit two and four way IEC socket outlets fitted with solid busbars and 2.8mm solder tags. Single piece moulding. Approved by VDE, SEV, SEMKO, UL and CSA.

### Technical Specification

Contact rating	10A 250V AC
	15AV AC (UL and CSA)
Terminations	2.8 x 0.8mm fast on
Housing	Nylon rated UL94V-0
Contacts	Copper alloy, tin plated
Dims 2 way	51.05(h) x 35.05(w)
	x 30.22(behind pnl)
4 way	98.04(H) X 35.05(w)
	x 30.22(behind pnl)
Temp range	-20° to +70° C



561-975	Multiple push fit 2 way IEC socket	£4.50
561-980	Multiple push fit 4 way IEC socket	£6.99

**INSULATING BOOTS** a range of insulating boots to ensure safe connections to rear of IEC chassis plugs and sockets. Code No 560-520 suits IEC unfused sockets 560-475 & 560-480. Part No 560-525 suits IEC fused sockets 560-490 & 560-495, also IEC chassis socket Part No. 560-500.



#### CODE TYPE

PRICE

PRICF

PRICE

560-520 Insul Boot for IEC Skt Unfused 560/475 & 480.... £0.65 Insul Boot for IEC Skt Fused 560-490/495/500.... 560-525 £0.85

> FREE PARKING FOR 2 HOURS OUTSIDE OF OUR SHOP

TEL. 01243 842424 FAX. 01243 842525 \_

TYPE

CODE

560-555

**IEC DISTRIBUTION BOARD** used to allow 4 pieces of equipment to be powered via one mains input. Features 4 IEC sockets (not fused) in an aluminium enclosure. Max. load 10A @ 250V, dimensions 45 x 75 x 220mm.



CODE	TYPE	PRICE
07-0492	IEC Distribution Board	£9.99

IEC CABLE SOCKET a rewireable cable socket manufactured to CEE22 and BS4491 approvals. Terminated with internal screw connections and cable strain relief. Contact rating 6A 250V AC.

	N. C.	
CODE	ТҮРЕ	PRICE
560-510	IEC Cable Socket	£1.75

**RIGHT ANGLE IEC CABLE SOCKET** a right angled rewireable 3pole IEC cable socket ideally suited to applications where space is at a premium. Screw clamp retains cable firmly and internal connection is via screw terminals. Suitable for cables up to 6.5mm diameter (inner core 3 x 3.75mm<sup>2</sup>). Rated at 10A 250V AC.



CODE	TYPE	PRICE
560-421	Right Angle IEC Cable Socket	£2.50

REWIREABLE CABLE PLUG A CEE22/BS4491 straight rewirable power take-off connector. Fitted with internal screw connections, screw grip cable clamp and strain relief. Contact rating 10A 250V AC.



CODF TYPF 560-418 Rewireable IEC Plug..... £1.99

MAINS POWER CORD SETS

STRAIGHT IEC MAINS CORD a non rewireable straight socket moulded to a 1.99 metre length of 3 core 0.75mm<sup>2</sup> cable sheathed overall in black. Rated at 10A 250V AC. ASTA approved to BS4491 & IEC320. Cable approved to BS6500. Free end requires a suitable BS fused plug.

<b>CODE</b>	TYPE	<b>PRICE</b>
560-540	IEC Socket on 1.99M Lead	£2.99

MOULDED 13A FUSED PLUG AND MAINS CORD a non rewireable moulded 13A plug fused at 5A moulded to a length of 3 core 0.75mm cable sheathed overall in black. Fully Tested and by ASTA The free cable end has stripped conductors. Cable Length 1.99 metres.



PRICE

13A FUSED PLUG TO STRAIGHT IEC MAINS CORD a non rewireable straight socket and moulded 13A plug fused at 5A moulded to a length of 3 core 0.75mm cable sheathed overall in black. Manufactured and ASTA approved to BS1363/A. Cable approved to BS6500.



CODE	ТҮРЕ	PRICE
560-545	IEC Socket/13A Plug on 2M Lead	£3.99
560-551	IEC Socket/13A Plug on 3.5M Lead	£4.99
560-553	IEC Socket/13A Plug on 5M Lead	£6.99
560-556	IEC Socket/13A Plug on 10M Lead	£11.99

IEC 'Y' MAINS LEAD WITH BS PLUG a mains lead with UK plug to 2 x IEC sockets. 2M length.



CODE	TYPE	PRICE
560-926	IEC `Y' Mains Lead with BS Plug 2M	£9.99

IEC/CEE22 CORD SET An IEC/CEE22 cord set, comprising a free straight socket and shrouded power take-off plug moulded to a 1.99 metre length of 3 core 0.75m2 cable sheathed overall in black. Designed primarily for power interconnection between equipment. Rated 6A 250V AC. Cable Approved to BS6500.



IEC 'Y' MAINS ADAPTOR LEAD a mains lead assembly with an IEC plug to 2 x IEC sockets. Length 0.5M.





E-mail: sales@squirestools.com - www.squirestools.com

IEC PLUG TO 3 IEC SOCKETS MAINS LEAD ideal for daisy chain mains connection of light effects units etc. 3 core 0.75mm<sup>2</sup> black cable, 2m cable from IEC plug to 1st joint then 1.5m cable to 2nd joint with 1.5m cable to the last IEC socket. The IEC sockets from the joints are on 100mm cable lengths. Approved connectors and cable.



CODE TYPE PRICE 07-0027 IEC Plug to 3 IEC Sockets Mains Exten Lead 5m £10.99

3-WAY IEC MAINS LEAD WITH SURGE PROTECTION a unique 3-way IEC connectors allowing computer, monitor and peripheral units to be powered and protected with a single mains lead. Ideal for use at home or in the office. Protects valuable multimedia equipment from harmful surges and spikes which can occur in the voltage supply. Green neon surge indicator, safety thermal cutout. 3-way mains protection: L-N/L-E/N-E. Surge device conforms to EN61643-11 Conforms to BS1363A. Cable 0.5m (1.00mm<sup>2</sup>) to junction and 3 x 0.5m (0.75mm<sup>2</sup>) to connectors.

### Specification

Rating 13A, 250V/50Hz Thermal fuse 2A, 115°C Max. surge 3 x 6000A Response time < 1nS



CODE TYPE PRICE 07-0024 3-Way IEC Mains Lead with Surge Protection ..... £14.99

MOULDED 13A FUSED PLUG TO FIGURE 8 CONNECTOR a non rewireable moulded 13A plug fused at 3A moulded to a length of 2 core 0.75mm cable sheathed overall in black. The 8.6mm centred 2 pin socket is ideal for use with portable battery/mains equipment.

Cable Length 1.5m.

TYPF

CODF

PRICE 560-560 13A Plug to Figure 8 Connector 1.5M..... £2.99

CLOVER LEAF STYLE MAINS LEAD a Clover Leaf style nonrewireable connector for use with laptop computers. Black 0.75mm<sup>2</sup> cable with moulded 13A plug fused @ 3A. Length 2m.



CODE TYPE 07-0021 Clover Leaf Style Mains Lead 3A 2m.....

## **FREE PARKING FOR 2 HOURS** OUTSIDE OF OUR SHOP

HOT MAINS IEC KETTLE LEAD a 10A mains lead constructed from approved rubber cable. Available in black or white.



CODE	ТҮРЕ	PRICE
07-0454	Hot Mains IEC Kettle Lead Black 1m	£3.99
07-0457	Hot Mains IEC Kettle Lead White 1m	£3.99

## POST FREE DELIVERY **ON ALL ORDERS WITHIN** THE UNITED KINGDOM MINIMUM ORDER VALUE £10.00

WHEN PLACING AN ORDER PLEASE **USE THE FULL ORDER CODE** INCLUDING ANY PUNCTUATION

IF THERE ARE OTHER PRODUCTS THAT YOU WOULD LIKE US **TO STOCK, PLEASE FEEL** FREE TO LET US KNOW.

**FREE PARKING FOR 2 HOURS OUTSIDE OF OUR SHOP** 

**EXHIBITION SALES STAND** WE AIM TO EXHIBIT AS WIDE A RANGE AS POSSIBLE AT SHOWS, BUT DUE TO SPACE RESTRICTIONS WE ARE NOT ABLE TO FEATURE EVERY PRODUCT. IF YOU CONTACT US A FEW DAYS PRIOR TO AN EVENT WE WILL TRY TO ENSURE A PRODUCTS AVAILABILITY AT THAT SHOW.

PRICE

£4.50